




# LED LUMINAIRES

Energy efficient signal lighting

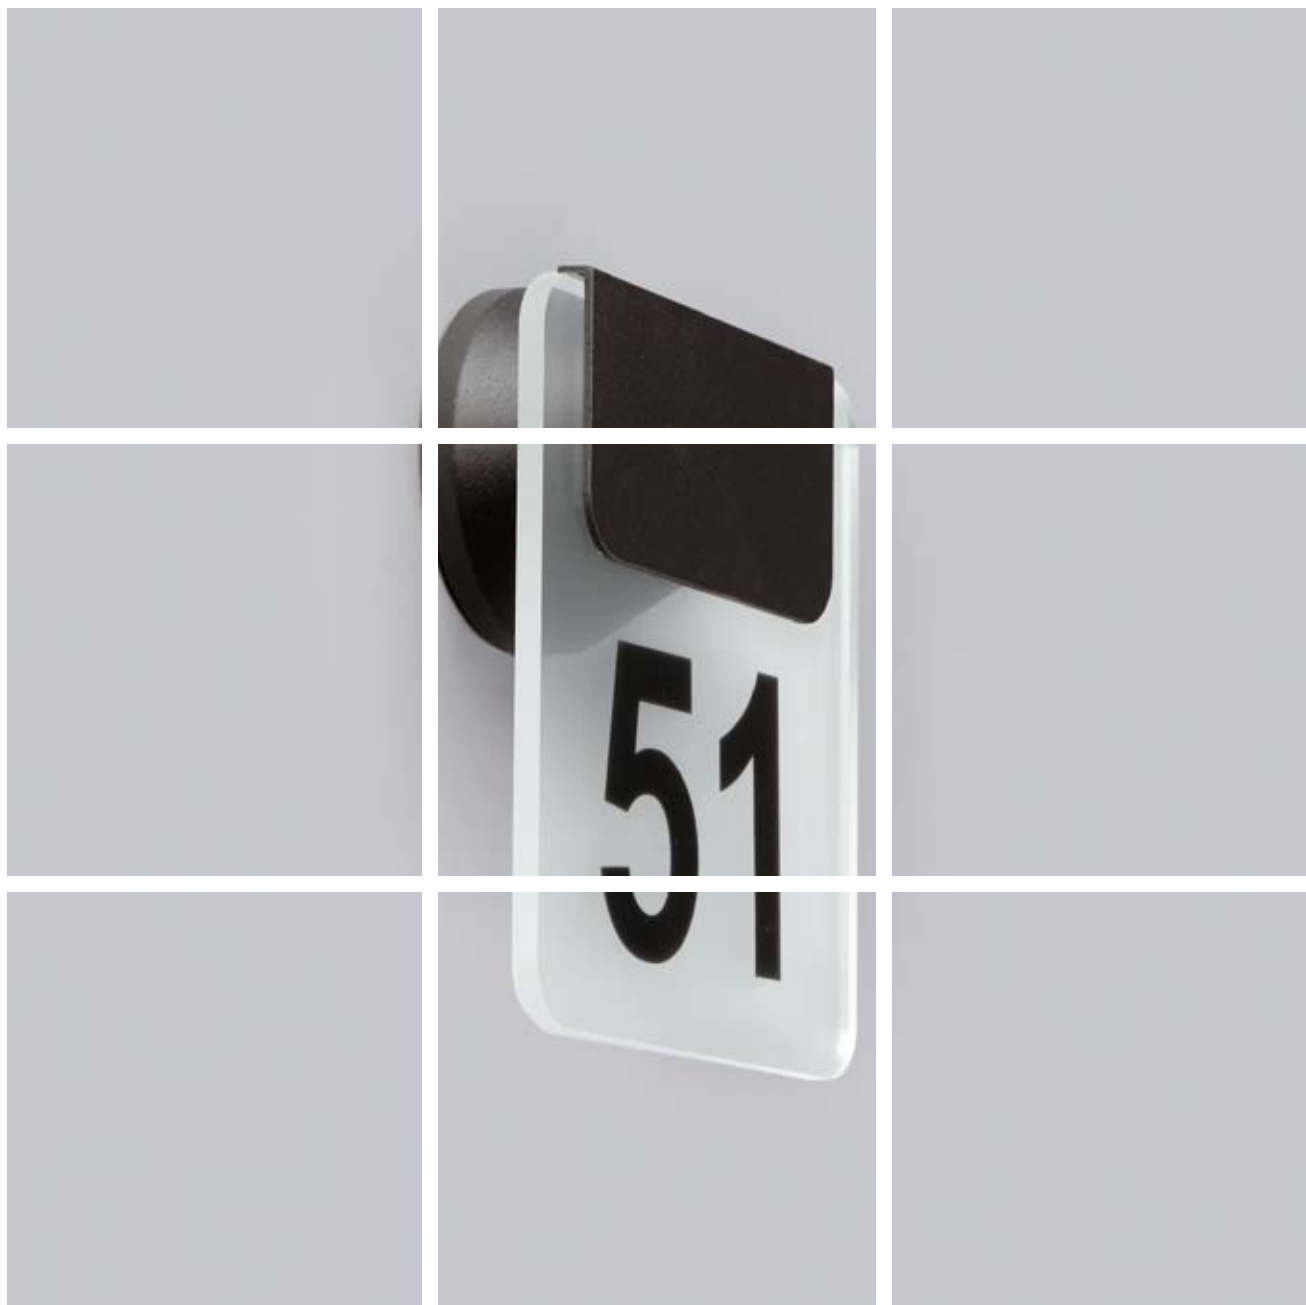

# LED LUMINAIRES

## Energy efficient signal lighting

Ensto is dedicated to providing energy efficient lighting solutions and therefore we have developed compact and durable LED luminaires for signal lighting. Two simple and stylish designed models, with horizontal or vertical installation, offer a timeless solution for all signal lighting needs.

Our LED luminaires for signal lighting are suitable for versatile use, including both indoor and outdoor applications. The long lasting 1,2 W power

LED is an excellent light source to light up the luminous acrylic sign plate. The sign plate is the perfect surface for text and symbols. The information, for example company logos and toilet, elevator and fire equipment signs, can be attached with stickers or be engraved directly onto the sign plate.

LED luminaires are easy to install by connection to the normal mains voltage. Because of the die-cast aluminium body and strong construction our LED luminaire can be recommended for use in house number lighting, room number lighting in hotels and signal lights in shopping centres and all public buildings.



AVR52.11LV




### TECHNICAL INFORMATION

#### LED luminaires for signal lighting



| TYPE       | EAN-CODE          | DESCRIPTION                      | WEIGHT (kg) |
|------------|-------------------|----------------------------------|-------------|
| AVR51.11LV | 64 186 77 617 935 | AVR51 IP65 1xLED 1W AC W (white) | 1,2         |
| AVR51.11L  | 64 186 77 617 928 | AVR51 IP65 1xLED 1W AC B (black) | 1,2         |
| AVR52.11LV | 64 186 77 617 959 | AVR52 IP65 1xLED 1W AC W (white) | 1,3         |
| AVR52.11L  | 64 186 77 617 942 | AVR52 IP65 1xLED 1W AC B (black) | 1,3         |

|                     |                                     |
|---------------------|-------------------------------------|
| Body:               | cast aluminium                      |
| Sign plate:         | shock-proof acrylic                 |
| Light source:       | 350 mA, 360 ° white power LED 1,2 W |
| Total power:        | 2 W                                 |
| Class:              | I electrical                        |
| Ingress protection: | IP65                                |
| Connection:         | 3 x 2,5 mm <sup>2</sup> -o          |
| Colours:            | black and white                     |
| Vandal resistance:  | IK08 (5 J)                          |

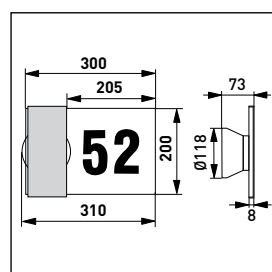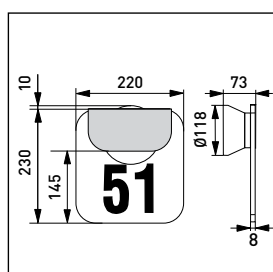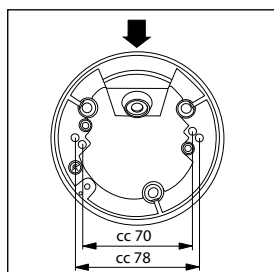

ENSTO ELECTRIC OY  
P.O. BOX 110  
06101 PORVOO, FINLAND  
TEL. +358 (0) 204 76 21  
FAX +358 (0) 204 76 2753  
ELECTRIC@ENSTO.COM  
WWW.ENSTO.COM